

## CP2000-CT3-PB

Low-Volume Push Button Countertop Sparkling, Ambient Still, and Chilled Still Water Dispenser



Low-volume push-button countertop beverage dispensing unit that provides cold-carbonated sparkling, ambient still, and chilled still water. Self-contained refrigeration with European design stainless steel exterior. Suitable for office, hotel suites, wineries, and residential.

### Features

- Cold carbonation at up to 50, 12oz drinks/hour (<40°F)
- Triple-water dispensing (sparkling + ambient still + chilled still)
- High-efficiency self-contained refrigeration
- Durable, 304 brushed stainless steel exterior\*
- Cup fill station with 9" clearance

**R290**



### Accessories

- Water filter system (required):
  - CR-14FC: Single filter system, compact fibredyne filters, reduce chlorine, taste, odor, color while retaining the good minerals that are essential for bottle quality tasting water, 18"H x 8"W, 2.5 gpm, 15,000 gal, TOC & ½ micron filtration
  - CR-14FCP: Single filter system with prefilter, compact fibredyne filters, reduce chlorine, taste, odor, color and organic chemicals while providing exceptional sediment reduction with resistance to premature plugging, 15"H x 14"W, 2.5 gpm, 15,000 gal, TOC & ½ micron filtration
- Install kit (required):
  - CR-KIT-CPCT: Installation kit for CP2000-CT countertop units, includes water pressure reducer valve, fittings, and extra tubing to install the filter systems and countertop unit
- CO2 regulators:
  - CR-PC160-14FCV: Primary high pressure CO2 regulator for CO2 tank
  - CR-S115-14FCV: Secondary CO2 regulator for bulk CO2 supply
- Wall brackets:
  - CR-CWB1: Single CO2 gas cylinder wall bracket
  - CR-CWB2: Twin CO2 gas cylinder wall bracket




# CP2000-CT3-PB

Low-Volume Push Button Countertop Sparkling, Ambient Still, and Chilled Still Water Dispenser



Scan for more resources!

## Line Drawings

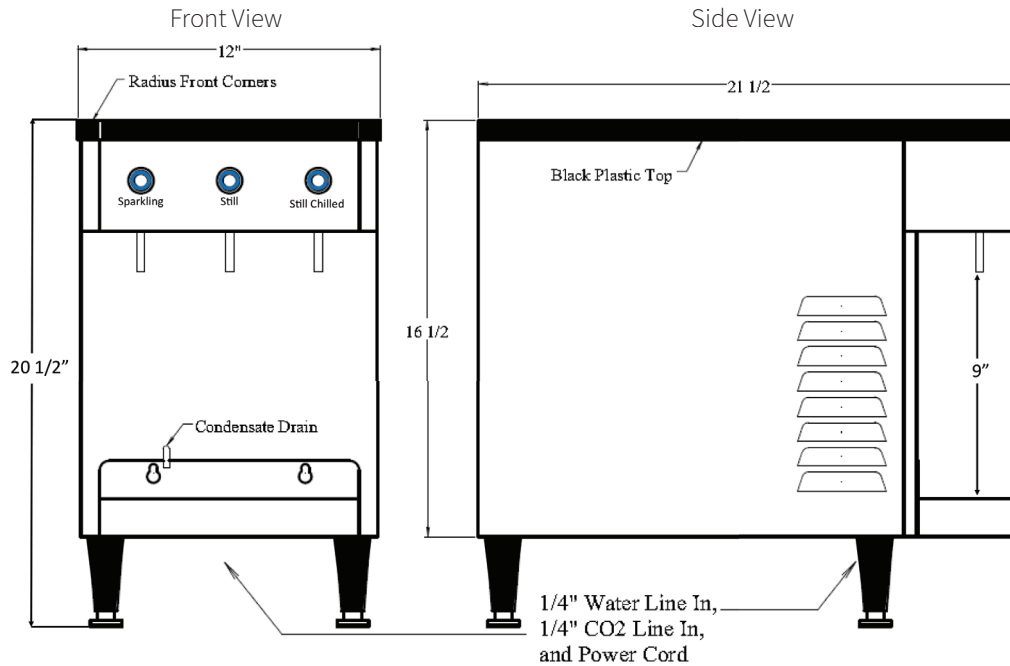

- 3/8" Water inlet push in fitting at back of machine
- 7' CO2 hose 1/4" flare fitting
- 9' Electrical cord NEMA 5-15
- 4.0" - 5.5" adjustable legs
- Air intake on side panels, exhausts out rear
- Allow for 6" rear & side clearance for air flow
- Condensate drain into drip pan

Capacity	50, 12oz drinks/hour (<40°F)
Refrigerant	R290
Width	12"
Depth	21.5"
Height	20.75"
Cup fill clearance	9"
Compressor	1/9 H.P.
Carbonator	1 GPM

Operating temp	40°F-100°F
Electrical	120v - 4.12 Amps
Water bath	2.5 gal
Ice bank	6 lbs
Weight	80 lbs