

## CR-1PB-3V

Countertop Push Button Sparkling, Ambient Still, and Chilled Still Water Dispenser



Commercial countertop push-button beverage dispensing unit that provides cold-carbonated sparkling, ambient still, and chilled still water. Self-contained refrigeration with European design stainless steel exterior. Suitable for high-volume self-service stations and hospitality applications.






### Features

- Cold carbonation at up to 50 liters/hour (<40°F)
- Triple-water dispensing (sparkling + ambient still + chilled still)
- High-efficiency self-contained refrigeration
- Durable 304 stainless steel exterior\*
- Bottle fill station with 11.75" clearance
- Push button dispensing

**R290**



### Accessories

- Water filter system (required):
  - CR-24FC: Twin filter system, compact fibredyne filters, reduce chlorine, taste, odor, color while retaining the good minerals that are essential for bottle quality tasting water, 19"H x 17"W, 5 gpm, 30,000 gal, TOC & ½ micron filtration 
  - CR-24FCP: Twin filter system with prefilter, compact fibredyne filters, reduce chlorine, taste, odor, color and organic chemicals while providing exceptional sediment reduction with resistance to premature plugging, 19.25"H x 21.75"W, 5 gpm, 30,000 gal, TOC & ½ micron filtration
- Install kit (required):
  - CR-KIT-CT: Installation kit for countertop units, CR-1 & CR-2, includes fittings and oetiker clamps and extra tubing to install the filter systems and countertop unit 
- CO2 regulators:
  - CR-PC160-14FCV: Primary high pressure CO2 regulator for CO2 tank 
  - CR-S115-14FCV: Secondary CO2 regulator for bulk CO2 supply
- Wall brackets:
  - CR-CWB1: Single CO2 gas cylinder wall bracket 
  - CR-CWB2: Twin CO2 gas cylinder wall bracket
- Cylinder auto change over device:
  - CR-CTAC2: CO2 cylinder auto change over device. Connects two cylinders at one time to double CO2 capacity 


# CR-1PB-3V

Countertop Push Button Sparkling, Ambient Still, and Chilled Still Water Dispenser



Scan for more resources!

## Line Drawings

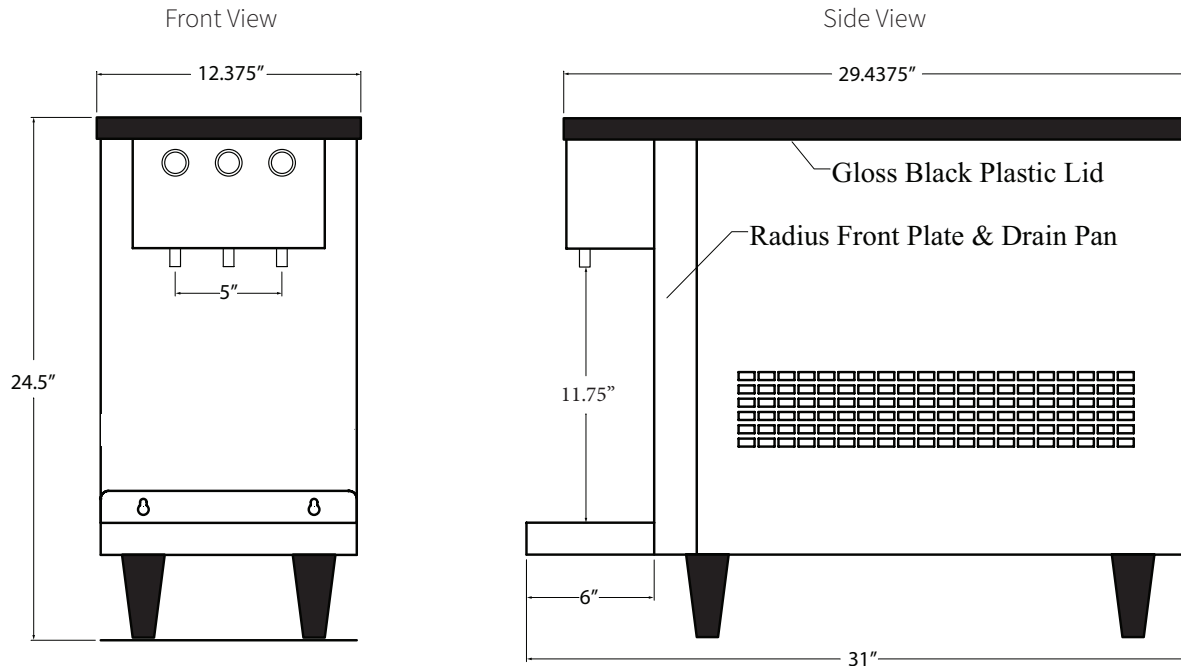

- 3/8" Water inlet push in fitting at bottom of machine
- 7' Over flow drain hose
- 7' CO2 hose 1/4" flare fitting
- 9' Electrical cord NEMA 5-15
- 4.0" - 5.5" adjustable legs
- Air intake at rear with air filter
- Allow for 6" side clearance for air flow out
- Allow for 3" of rear clearance for air flow in

Capacity	50 liters/hour (<40°F)
Refrigerant	R290
Width	12.375"
Depth	31"
Height	24.5"
Bottle fill clearance	11.75"
Compressor	1/5 H.P.
Carbonator	1/3 H.P.

Operating temp	40°F-100°F
Electrical	120v - 10.55 Amps
BTU Output	~2,200 BTU/hr
Water bath	4 gal
Ice bank	9.5 lbs
Weight	115 lbs