

Project:



Scan for more info!

Owners manual
Quick install
Quick sizing
Install layout
Parts list

CR-24FC

High Capacity Water Filter System



Compact size fits under the counter


Features advanced Fibredyne™ II bacteriostatic media that filters sediment down to 0.2 micron and provides chlorine taste, odor and color reduction while retaining the good minerals that are essential for bottle quality tasting water, at a flow rate of 5 gpm for 30,000 gallons.

Specifications

- System features two 4FC Cartridges:
 - Advanced Fibredyne technology
 - Quick Change sanitary cartridge
 - Recyclable
 - High Capacity, Extended filter life
- Manifold features water shut-off, flushing valve and water pressure gauge
- Inlet Connection: 3/4"
- Outlet Connection: 3/4"
- Flow Rate: 5 GPM
- Rated Capacity: 30,000 Gallons
- Pressure Requirements: 35-125 psi
- No Electrical connection
- 19" H x 17" W x 5.75" D

SPECIFICATIONS

System	Performance
Overall Dimensions 19" H x 17" W x 5.75" D	Service Flow Rate 5 gpm
Connections Inlet Connection: 3/4" FNPT Outlet Connection: 3/4" FNPT	Rated Capacity 30,000 gallons
Operating Pressure 50 - 125 psi	Chlorine Taste & Odor Reduction Yes
Water Temperature 35 - 100°F	Particulate Reduction Yes
Operating Weight 17 lbs	Bacteriostatic Effects Yes
Shipping Weight 8 lbs	Cyst Reduction Yes
Electrical Connection None required	Turbidity Reduction Yes

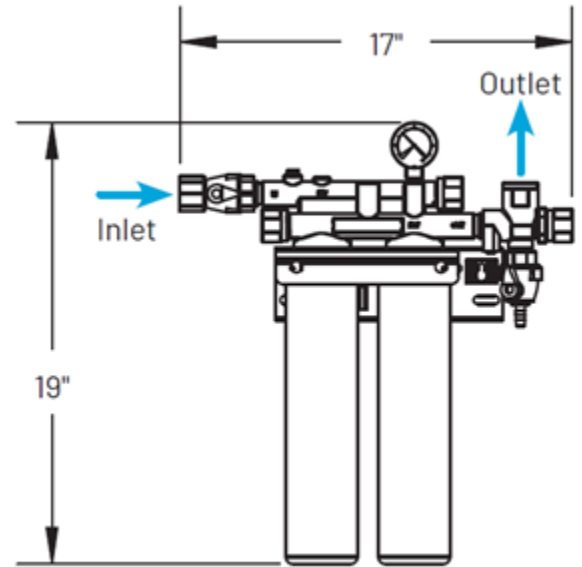

Features & Benefits:

- Increased capacity for extended reduction of chemical and mechanical contaminants
- Balanced cartridge for optimum performance in varying water qualities
- New Fibredyne II media with AgION antimicrobial protection inhibits any potential bacterial growth
- Reduces chlorine taste and odor and other offensive contaminants that can adversely affect the taste of beverages
- Improves the taste of fountain beverages and helps retain the drink's carbonation
- Submicron technology reduces dirt and particles as small as 1/2 micron in size, and reduces health contaminants such as Cryptosporidium and Giardia cysts
- Protects drink system seals, pump, tubing and small orifices from clogging, corrosion and abrasive wear
- Sanitary cartridge replacement is simple, quick and clean. Internal filter parts are never exposed to handling or contamination
- Certified under NSF/ANSI standards 42 and 53 through Everpure
 - NSF/ANSI Standard 42 certified for bacteriostatic effects and the reduction of chlorine taste & odor, and particulate class I
 - NSF/ANSI Standard 53 certified to reduce cysts such as cryptosporidium and giardia by mechanical means



Certified under Everpure: QC71 Twin - 4FC

Crysalli Beverage Systems a division of WPD
1739 Sabre Street, Hayward, CA 94545

www.crysalli.com



510.732.0100
CR03182025